SPECIFICATIONS

Current Rating: 1.00AMP
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : 500V AC/Minute
Operation Temperature: −40°C to+105°C
Contact Material: Brass
Contact plating: Au or Sn Over Ni
Insulator Material: Polyester (UL94V−0)
Standard: PA6T+30%GF

TH (Through Hole)

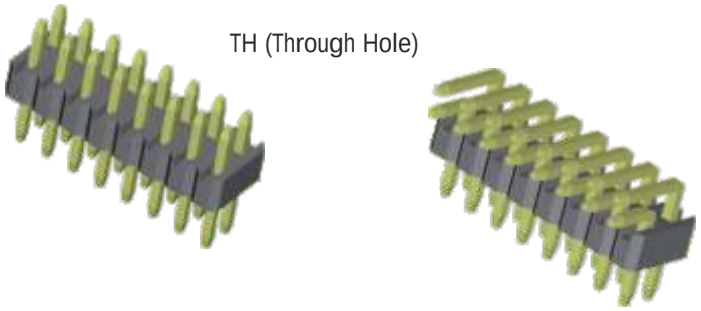

SMT (Surface Mount)

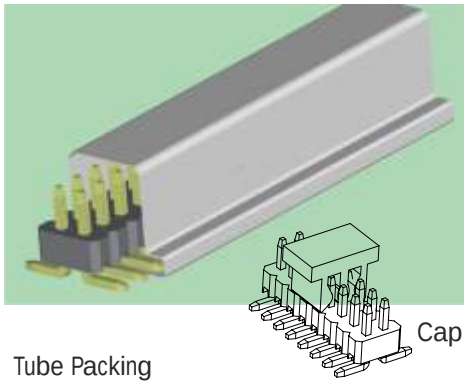

Cap (option)

Tube Packing

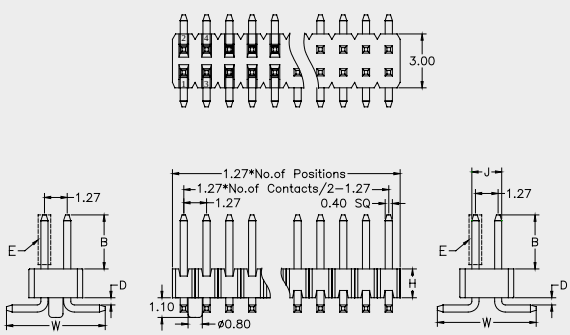

Dimension antitheses list													
ITEM	A		B		D		H		W	Plating Au "E"			
Standard	11.80	2.80	1.80	3.00	4.00	0	1.20	1.60	2.00	2.54	5.50	1.70	2.90	3.90
Alternate														



Recommended P.C. B Layout(Top Side)

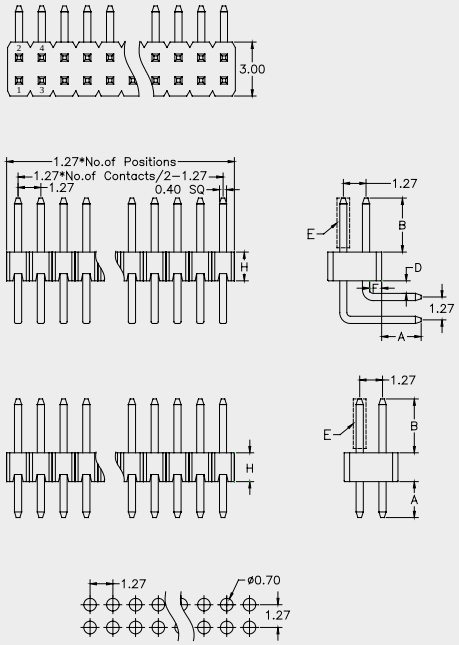

Recommended P.C. B Layout(Top Side)

REV	DATE	NOTE	NAME
1	120207	Logo changed	rok

rok090801rev120207

Pancon GmbH, Siemensstrasse 7, 61267 Neu-Anspach
Tel: +496081-964-0, Fax: +496081-964-201, www.pancon.de / GERMANY

Datenblatt / Datasheet