
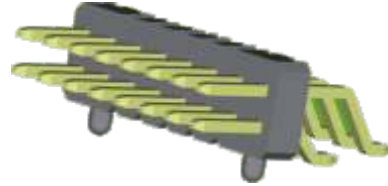




SPECIFICATIONS

Current Rating: 1.00AMP
 Contact Resistance: 20m Max.
 Insulation Resistance: 1000M Min.
 Withstanding Voltage : 500V AC/Minute
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact plating: Au or Sn Over Ni
 Insulator Material: Polyester (UL94V-0)
 Standard: PA6T+30%GF

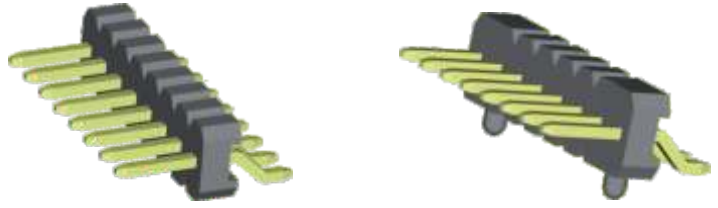


SINGLE ROW


DUAL ROW

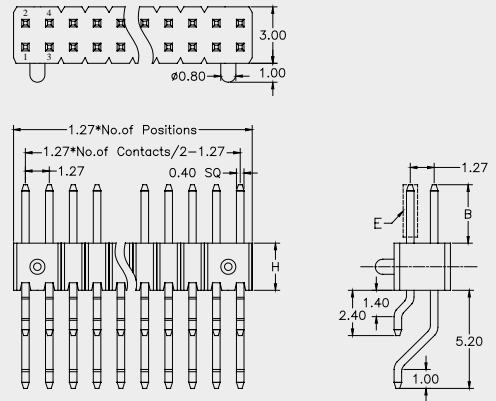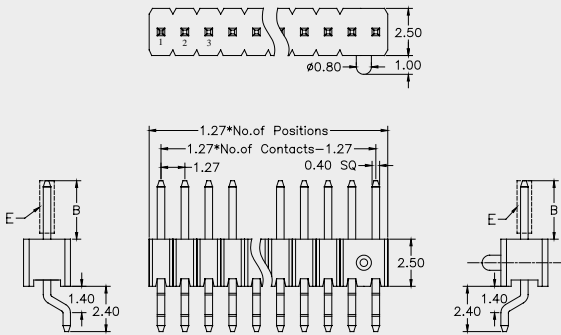

Dimension antitheses list			
ITEM	B	H	Plating Au "E"
Standard	3.10	2.50	3.40
Alternate			



Recommended P.C.B Layout(Top Side)

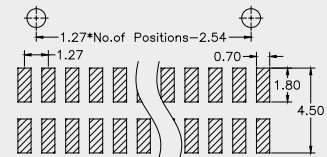

Recommended P.C.B Layout(Top Side)

1	120207	Logo changed	rok
REV	DATE	NOTE	NAME